




# iPad Air LTE SIM Board Cable Replacement


Written By: Andrew Optimus Goldberg

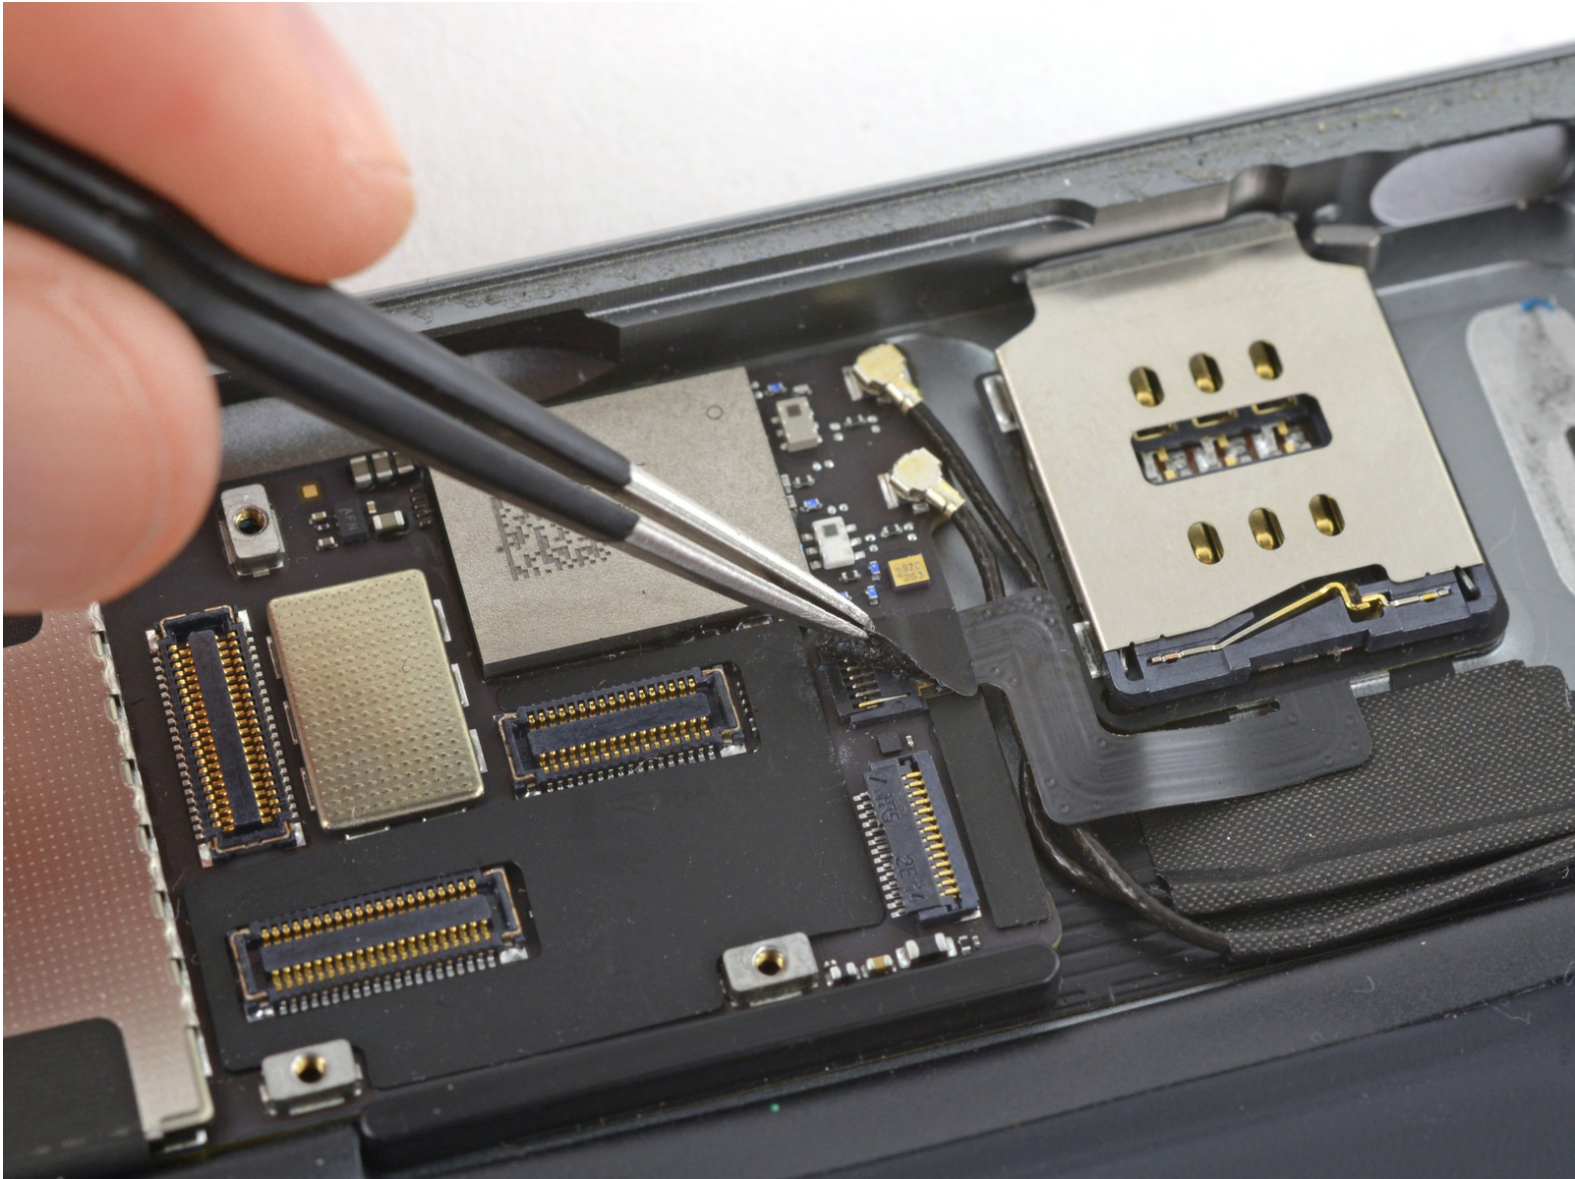

## INTRODUCTION


prereq for SIM board removal and maybe also logic board removal

## Step 1 — SIM Board Cable

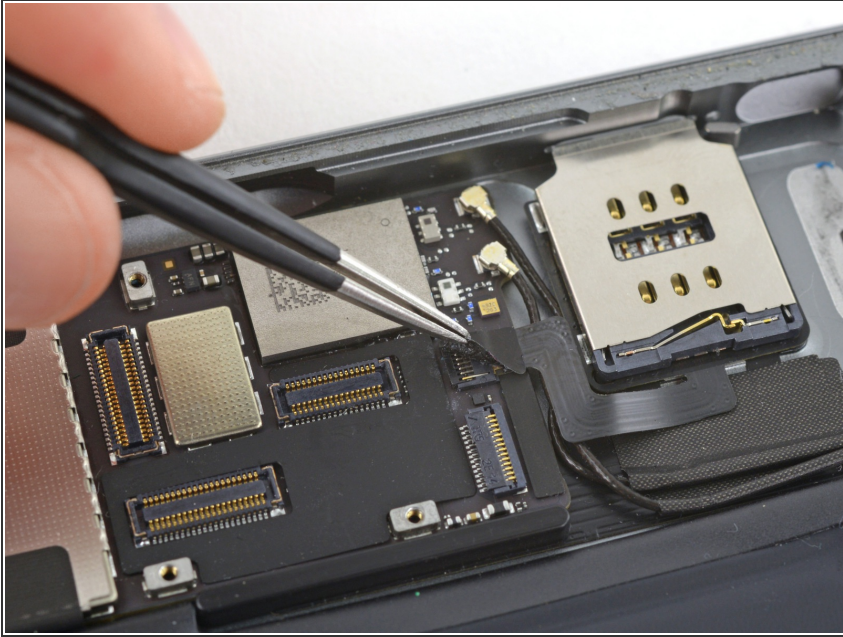

- Use tweezers to peel and remove the piece of tape covering the SIM board cable connector on the logic board.

## Step 2

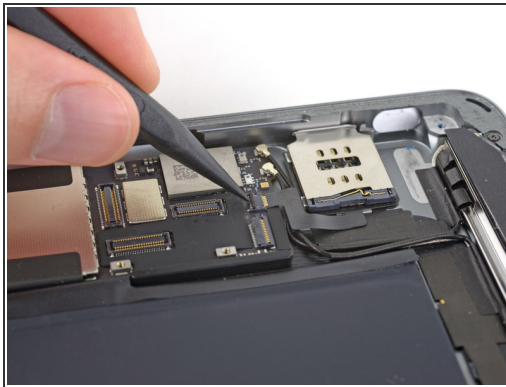

- Use the pointed end of a spudger to flip up the retaining flap on the SIM board cable connector.
- Slide the SIM board cable straight out of its ZIF connector.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 01:37:25 AM.